




ÇATÖREN DAM AND FACILITIES CONSTRUCTION



Central Anatolia Region
Eskişehir - Seyitgazi



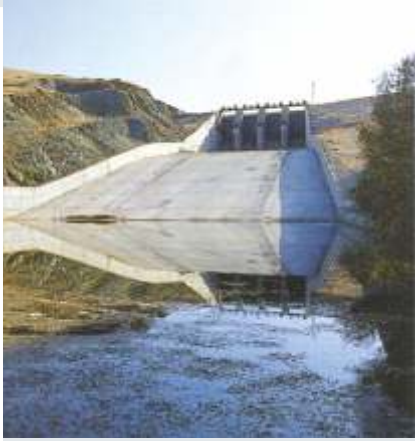

Employer : GENERAL DIRECTORATE OF STATE HYDRAULIC WORKS (DSİ)
Contract Date : 14.02.1984
Work Completion Date : 15.06.1987
Project Cost : 666 603 873,00 TL

Dam and its facilities were constructed for the purpose of irrigation and flood control on Harami Stream, a tributary of Seydi River, at 20 km southwest of Seyitgazi district of Eskişehir.

Characteristics of the Work;

Dam
Type : Earth Fill
Height (from foundation) : 37 m
Total Storage Volume : 47 000 000 m³

Spillway
Type : 4 each 5.75 x 9.25 m radial gates
Spillway Length : 198.56 m

Diversion Tunnel
Length : 265.00 m
Inner Diameter : 3.00 m (circular)

